


KK **KK- DOUBLE ECCENTRIC BUTTERFLY VALVE FOR SHUT-OFF AND MODULATING SERVICE**

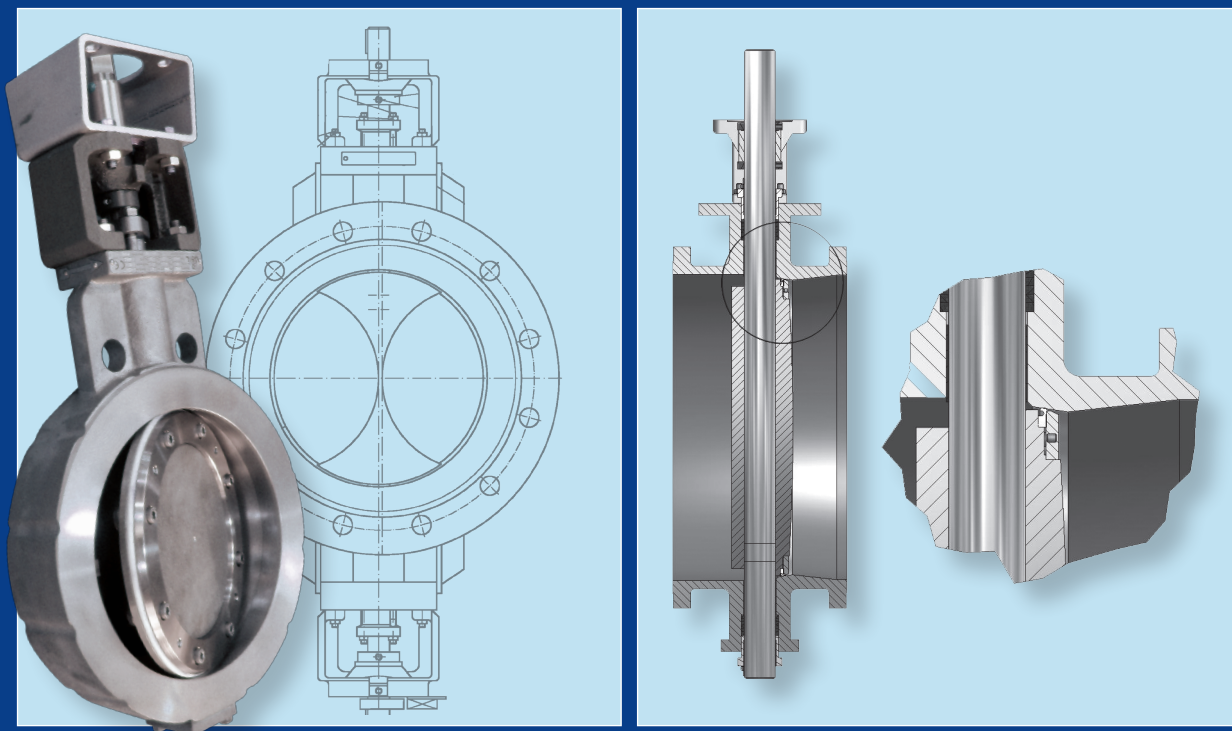

Type: KK- Double eccentric Butterfly Valve for shut-off and modulating service

Description:

Resilient seated Butterfly valve for shut-off and modulating service.
Double eccentric offset. Gas-tight shut-off by means of proven sealing methods.
Endless profiled sealing element. Quality of sealing element is adapted to the application. Suitable for oxygen, gases, exhaust gases and fluids as well as abrasive and corrosive media. Low breakaway torques and maintenance free operation allows a maximum on operational reliability.

Sizes:	DN 100 - DN 2000
Pressure rating:	PN 6 - PN 40 / ANSI Class 150 - 300
Temperatures:	-10° C ... +200° C
Leakage class:	EN 12266-1 A / ASME B 16.104 Class VI

Executions:

- Wafer type design
- Double flange design
- Double flange design with threaded holes
- Butt welded design

Special executions:

- Heating jacket
- Special materials
- Dual shut-off (Type: KD)
- Hard facing

Applications:

- **Power Stations**
- **Steel works**
- **Paper / Pulp Industry**
- **Chemical Industry**
- **Petrochemical Industry**
- **District Heating**